


※ Include rubber washer & Lock-nut

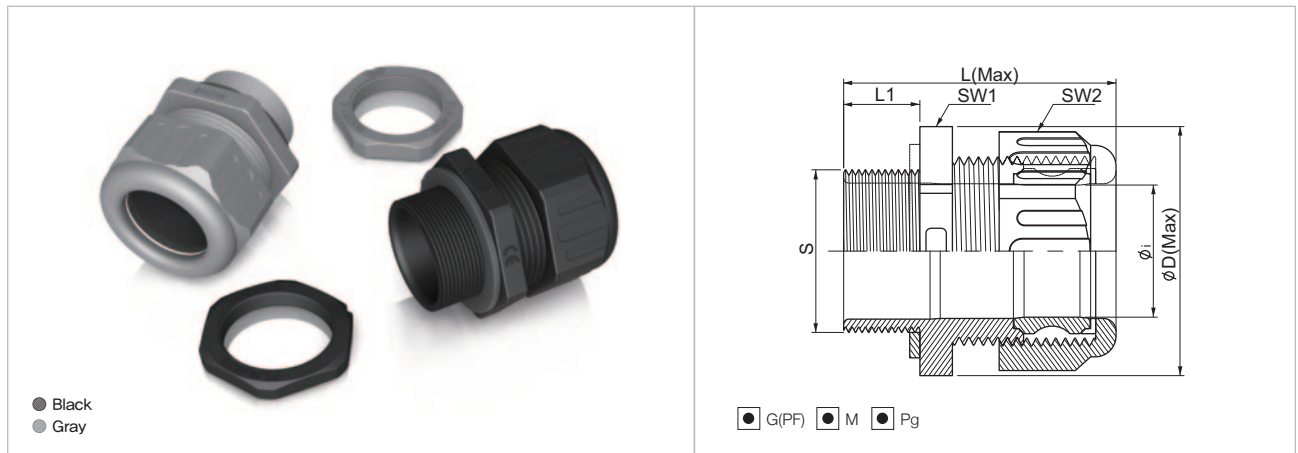

- Material : High Quality Polyamide 6 (PA6)
- Degrees of Protection : IP 68 (EN 60529)
- The max. Instantaneous Temperature : -40°C ~ +105°C
- Short Term : +150°C
- Self-Extinguishing : UL94-HB
- Eco-friendly : Free of Halogen & cadmium
- Color : Black & Gray
- Application : Connector for control box radio box or cables from electric machine.
Water & Dust, Oil proof halogen free.

Product Size

Ordering No.								
--------------	--	--	--	--	--	--	--	--

PF Thread (JIS B0202)

Black	Gray	Thread(inch)	Øi(Min)	Øi(Max)	S	L1	L	ØD	SW1	SW2
FCG-G10B	FCG-G10G	G1/2	3.5	7.0	20.5	15.0	42.0	25.0	22.6	18.0
FCG-G12B	FCG-G12G	G1/2	4.0	8.8	20.5	15.0	45.7	29.0	25.4	20.5
FCG-G16B	FCG-G16G	G1/2	6.5	13.0	20.5	15.0	46.2	28.4	25.4	25.6
FCG-G1622B	FCG-G1622G	G1/2	11.0	19.0	20.5	15.0	52.8	38.4	34.0	34.2
FCG-G22B	FCG-G22G	G3/4	11.0	19.0	26.2	15.0	52.8	38.4	34.0	34.2
FCG-G228B	FCG-G228G	G3/4	17.5	26.2	26.2	15.0	52.0	48.5	43.2	42.3
FCG-G28B	FCG-G28G	G1	17.5	26.2	32.8	15.0	52.0	48.5	43.2	42.0
FCG-G36B	FCG-G36G	G1 1/4	21.0	33.3	41.7	19.0	67.4	58.0	52.5	51.6
FCG-G48B	FCG-G48G	G2	33.5	45.2	59.0	19.0	66.8	73.0	66.5	67.0

Ordering No.



Metric Thread (EN 60423)

Black	Gray	Thread	Øi 최소)	Øi(Max)	S	L1	L	ØD	SW1	SW2
FCG-M10B	FCG-M10G	M12 X 1.5	3.5	7.0	11.8	15.0	43.0	25.4	22.6	18.0
FCG-M120B	FCG-M120G	M16 X 1.5	3.5	7.0	15.8	15.0	43.0	25.4	22.6	18.0
FCG-M102B	FCG-M102G	M12 X 1.5	4.0	8.8	11.8	15.0	47.5	28.6	25.4	21.0
FCG-M12B	FCG-M12G	M16 X 1.5	4.0	8.8	15.8	15.0	45.0	28.6	25.4	20.5
FCG-M162B	FCG-M162G	M20 X 1.5	4.0	8.8	19.8	15.0	45.0	28.6	25.4	20.5
FCG-M126B	FCG-M126G	M16 X 1.5	6.5	13.0	15.8	15.0	46.3	28.8	25.4	25.6
FCG-M16B	FCG-M16G	M20 X 1.5	6.5	13.0	19.8	15.0	46.3	28.8	25.4	25.6
FCG-M1622B	FCG-M1622G	M20 X 1.5	11.0	19.0	19.8	15.0	53.5	38.4	34.0	34.0
FCG-M22B	FCG-M22G	M25 X 1.5	11.0	19.0	24.7	15.0	52.5	38.4	34.0	34.0
FCG-M228B	FCG-M228G	M25 X 1.5	17.5	26.2	24.7	15.0	53.5	48.5	43.2	42.0
FCG-M28B	FCG-M28G	M32 X 1.5	17.5	26.2	31.7	15.0	52.5	48.5	43.2	42.0
FCG-M36B	FCG-M36G	M40 X 1.5	21.0	33.3	39.6	19.0	67.0	58.0	52.5	51.6
FCG-M48B	FCG-M48G	M50 X 1.5	33.5	45.2	49.6	19.0	66.0	73.0	66.5	67.0

Pg Thread (DIN 40430)

Black	Gray	Thread	Øi (Min)	Øi (Max)	S	L1	L	ØD	SW1	SW2
FCG-P07B	FCG-P07G	Pg07	3.5	7.0	12.3	15.0	45.2	25.4	22.6	18.0
FCG-P09B	FCG-P09G	Pg09	3.5	7.0	14.9	15.0	43.0	25.4	22.6	18.0
FCG-P072B	FCG-P072G	Pg07	4.0	8.8	12.3	15.0	47.5	28.6	25.4	21.0
FCG-P092B	FCG-P092G	Pg09	4.0	8.8	14.9	15.0	47.5	28.6	25.4	21.0
FCG-P11B	FCG-P11G	Pg11	4.0	8.8	18.3	15.0	45.6	25.2	25.4	20.5
FCG-P132B	FCG-P132G	Pg13.5	4.0	8.8	20.2	15.0	47.5	28.6	25.4	21.0
FCG-P162B	FCG-P162G	Pg16	4.0	8.8	22.3	15.0	45.6	28.2	25.4	20.5
FCG-P096B	FCG-P096G	Pg09	6.5	13.0	14.9	15.0	46.5	28.2	25.4	25.6
FCG-P116B	FCG-P116G	Pg11	6.5	13.0	18.3	15.0	48.0	28.8	25.4	25.6
FCG-P13B	FCG-P13G	Pg13.5	6.5	13.0	20.2	15.0	46.5	28.2	25.4	25.6
FCG-P16B	FCG-P16G	Pg16	6.5	13.0	22.3	15.0	46.5	28.8	25.4	25.6
FCG-P122B	FCG-P122G	Pg11	11.0	19.0	18.3	15.0	53.5	38.4	34.0	34.2
FCG-P1322B	FCG-P1322G	Pg13.5	11.0	19.0	20.2	15.0	53.5	38.4	34.0	34.2
FCG-P1622B	FCG-P1622G	Pg16	11.0	19.0	22.3	15.0	53.5	38.4	34.0	34.2
FCG-P21B	FCG-P21G	Pg21	11.0	19.0	28.0	15.0	53.5	38.4	34.0	34.2
FCG-P218B	FCG-P218G	Pg21	17.5	26.2	28.0	15.0	52.0	48.5	43.0	42.3
FCG-P29B	FCG-P29G	Pg29	17.5	26.2	36.8	15.0	52.0	48.5	43.0	42.3
FCG-P36B	FCG-P36G	Pg36	21.0	33.3	46.7	19.0	67.8	58.5	52.5	51.6
FCG-P48B	FCG-P48G	Pg48	33.5	45.2	59.0	19.0	67.2	73.0	66.5	66.7