







- Material : High Quality Polyamide 6 (PA6)
- The max. Instantaneous Temperature : -40°C ~ +105°C
- Short Term : +150°C
- Self-Extinguishing : UL94-HB
- Eco-friendly : Free of Halogen & cadmium
- Color : Black & Gray
- Application : Fixing tubes
By making more screw holes, the clip is more stable and the hinge cover is easy to use. This new clip was developed to facilitate straight arrangement and be installable at any size.

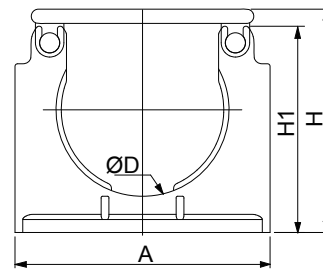

NFH-07

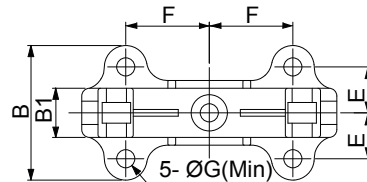


NFH-56 / 70 / 95

Product Size

Black	Gray	Tube Size	ØD	A	H	H1	B	B1	E	F	ØG	Bolt
NFH-07B	NFH-07G	07	10.0	16.6	20.6	17.9	14.5	10.0	—	—	5.0	1-M4
NFH-56B	NFH-56G	56	66.5	99.0	86.3	79.7	52.0	19.0	17.75	32.30	6.4	5-M6
NFH-70B	NFH-70G	70	82.0	121.0	105.6	97.6	63.0	23.0	21.50	39.50	8.7	5-M8
NFH-95B	NFH-95G	95	105.3	155.4	136.5	125.8	82.0	30.0	28.00	51.70	8.7	5-M8



- Material : High Quality Polyamide 6 (PA6)
- The max. Instantaneous Temperature : -40°C ~ +105°C
- Short Term : +150°C
- Self-Extinguishing : UL94-HB
- Eco-friendly : Free of Halogen & cadmium
- Color : Black & Gray
- Application : Fixing tubes
By making more screw holes, the clip is more stable and the hinge cover is easy to use.
This new clip was developed to facilitate straight arrangement and be installable at any size.

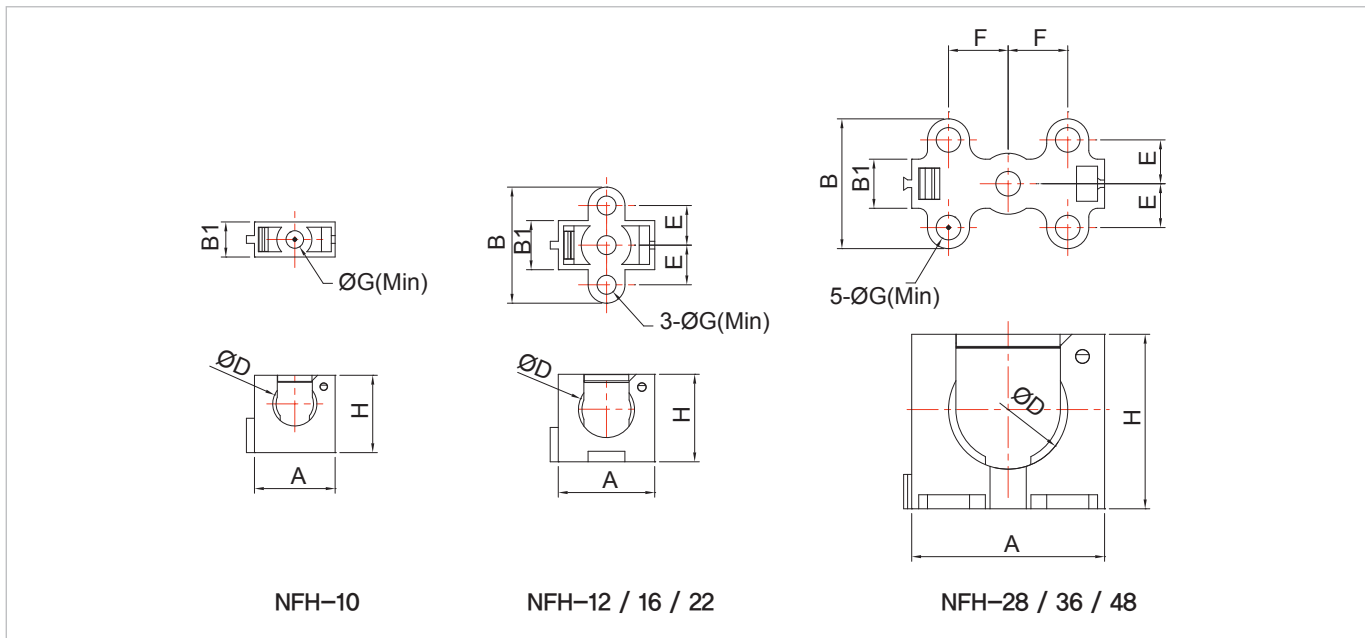

Product Size

Black	Gray	Tube Size	ØD	A	H	B	B1	E	F	ØG	Bolt
NFH-10B	NFH-10G	10	13.0	23.0	22.0	—	10.0	—	—	5.0	1-M4
NFH-12B	NFH-12G	12	16.0	27.5	25.0	33.0	14.0	11.3	—	5.4	3-M5
NFH-16B	NFH-16G	16	21.4	34.3	33.0	35.9	14.0	12.0	—	5.4	3-M5
NFH-22B	NFH-22G	22	28.0	45.5	41.7	37.9	14.0	12.0	—	6.4	3-M6
NFH-28B	NFH-28G	28	34.0	55.0	49.7	36.9	14.0	12.5	17.0	7.0	5-M6
NFH-36B	NFH-36G	36	42.0	66.0	60.3	41.5	14.0	13.5	18.8	7.0	5-M6
NFH-48B	NFH-48G	48	53.7	84.9	73.7	41.5	14.0	13.5	28.0	7.0	5-M6