




## Type NATR-NATV

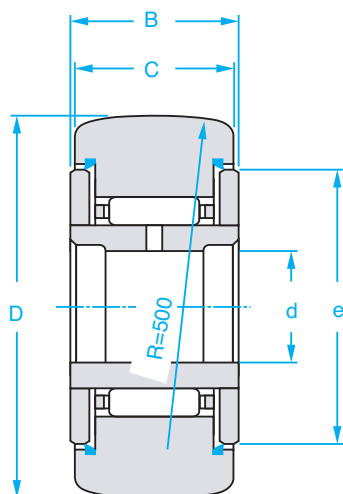

NATR

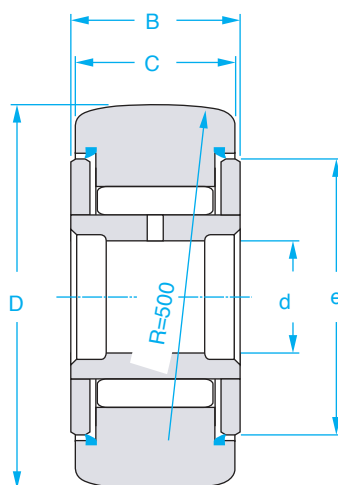

NATV

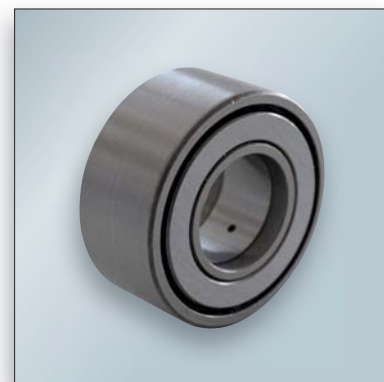

NATV galet à aiguilles jointives  
NATR galet à aiguilles

| Référence<br>Type | Dimensions - mm |    |    |    |    | Charge<br>Basic load<br>N |              | Vitesse limite<br>Max. speed<br>tr/min | Poids<br>Weight<br><br>g |
|-------------------|-----------------|----|----|----|----|---------------------------|--------------|----------------------------------------|--------------------------|
|                   | D               | B  | C  | d  | d2 | Dyn.<br>Cr                | Stat.<br>Cor | Graisse<br>Grease                      |                          |
|                   |                 |    |    |    |    |                           |              |                                        |                          |
| NATR5LL           | 16              | 12 | 11 | 5  | 12 | 3 150                     | 3 300        | 13 000                                 | 14                       |
| NATR6LL           | 19              | 12 | 11 | 6  | 14 | 3 500                     | 3 900        | 10 000                                 | 19                       |
| NATR8LL           | 24              | 15 | 14 | 8  | 19 | 5 500                     | 6 400        | 7 500                                  | 38                       |
| NATR10LL          | 30              | 15 | 14 | 10 | 23 | 6 800                     | 8 600        | 5 500                                  | 61                       |
| NATR12LL          | 32              | 15 | 14 | 12 | 25 | 6 900                     | 8 800        | 4 500                                  | 66                       |
| NATR15LL          | 35              | 19 | 18 | 15 | 27 | 9 700                     | 14 100       | 3 600                                  | 95                       |
| NATR17LL          | 40              | 21 | 20 | 17 | 32 | 10 900                    | 15 500       | 2 900                                  | 139                      |
| NATR20LL          | 47              | 25 | 24 | 20 | 37 | 15 500                    | 25 500       | 2 400                                  | 236                      |
| NATR25LL          | 52              | 25 | 24 | 25 | 42 | 15 400                    | 26 500       | 1 800                                  | 271                      |
| NATR30LL          | 62              | 29 | 28 | 30 | 51 | 23 600                    | 38 500       | 1 300                                  | 445                      |
| NATR35LL          | 72              | 29 | 28 | 35 | 58 | 25 500                    | 44 500       | 1 000                                  | 550                      |
| NATR40LL          | 80              | 32 | 30 | 40 | 66 | 33 000                    | 59 000       | 850                                    | 800                      |
| NATV5LL           | 16              | 12 | 11 | 5  | 12 | 4 850                     | 6 500        | 3 800                                  | 15                       |
| NATV6LL           | 19              | 12 | 11 | 6  | 14 | 5 500                     | 7 900        | 3 100                                  | 21                       |
| NATV8LL           | 24              | 15 | 14 | 8  | 19 | 7 800                     | 11 400       | 2 500                                  | 42                       |
| NATV10LL          | 30              | 15 | 14 | 10 | 23 | 9 500                     | 14 600       | 2 100                                  | 65                       |
| NATV12LL          | 32              | 15 | 14 | 12 | 25 | 9 700                     | 15 400       | 1 800                                  | 69                       |
| NATV15LL          | 35              | 19 | 18 | 15 | 27 | 12 800                    | 23 000       | 1 600                                  | 101                      |
| NATV17LL          | 40              | 21 | 20 | 17 | 32 | 14 800                    | 26 500       | 1 400                                  | 147                      |
| NATV20LL          | 47              | 25 | 24 | 20 | 37 | 20 600                    | 42 000       | 1 300                                  | 245                      |
| NATV25LL          | 52              | 25 | 24 | 25 | 42 | 20 500                    | 44 000       | 1 000                                  | 281                      |
| NATV30LL          | 62              | 29 | 28 | 30 | 51 | 30 500                    | 62 000       | 850                                    | 468                      |
| NATV40LL          | 80              | 32 | 30 | 40 | 66 | 41 000                    | 90 000       | 650                                    | 832                      |

Température de fonctionnement de -20°C/+100°C