



2-3 LML Series

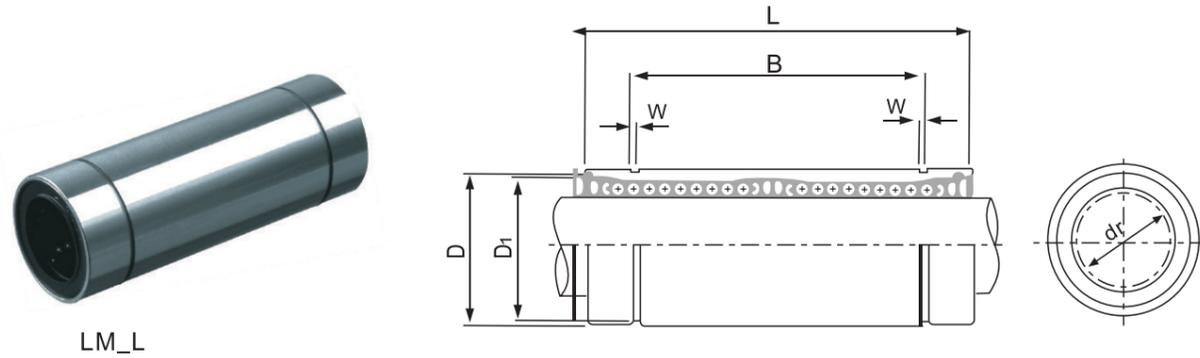

2-4 LMEL Series

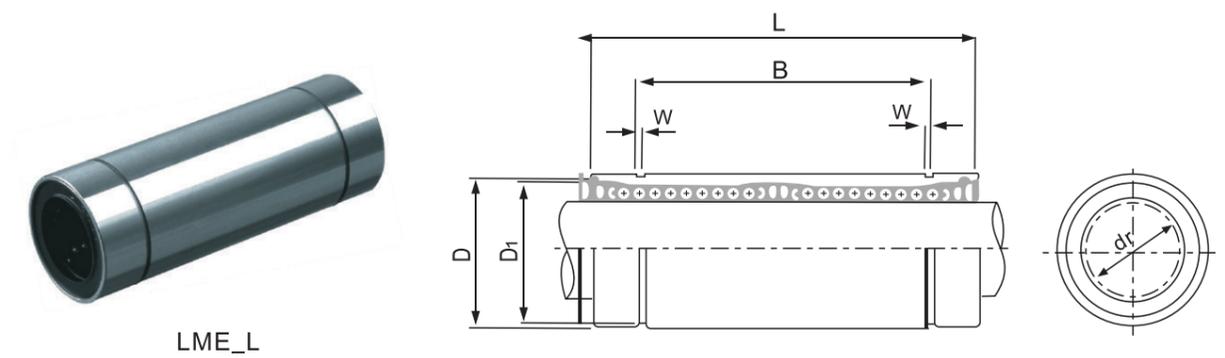

Linear Guideways

Ball Screw

Support

Linear Bushing

Linear Guideways

Ball Screw

Support

Linear Bushing

Part No.		Main Dimensions and Tolerance										Basic Load Rating		Eccentricity	Weight (g)							
Seal Type	Ball Circuit	dr (mm)	Tolerance (μm)	D (mm)	Tolerance (μm)	L (mm)	Tolerance (μm)	B (mm)	Tolerance (μm)	W (mm)	D1 (mm)	C N	Co N									
	LM6LUU	4	6	0 -10	12	0 -13	35	0 -300	0 -400	27	1.1	11.5	323	530	15	16						
	LM8LUU	4	8		15		45										35	1.1	14.3	431	784	31
☆	LM10LUU	4	10		19		55										44	1.3	18	588	1100	62
☆	LM12LUU	4	12		21		57										46	1.3	20	813	1570	80
	LM13LUU	4	13		23		61										46	1.3	22	813	1570	90
☆	LM16LUU	5	16	0 -12	28	0 -19	70	0 -400	0 -500	53	1.6	27	1230	2350	20	145						
☆	LM20LUU	5	20		32		80										61	1.6	30.5	1400	2740	180
☆	LM25LUU	6	25		40		112										82	1.85	38	1560	3140	440
☆	LM30LUU	6	30		45		123										89	1.85	43	2490	5490	580
	LM35LUU	6	35		52		135										99	2.1	49	2650	6270	795
☆	LM40LUU	6	40	0 -15	60	0 -22	151	0 -500	121	148	2.1	57	3430	8040	25	1170						
	LM50LUU	6	50		80		192										2.6	76.5	6080	15900	3100	
	LM60LUU	6	60		0/-20		90										0/-25	209	3.15	86.5	7550	20000

Note : ☆ means steel retainer is available.

Part No.		Main Dimensions and Tolerance										Eccentricity	Basic Load Rating		Weight (g)					
Seal Type	Ball Circuit	dr (mm)	Tolerance (μm)	D (mm)	Tolerance (μm)	L (mm)	Tolerance (μm)	B (mm)	Tolerance (μm)	W (mm)	D1 (mm)		C N	Co N						
	LME8LUU	4	8	+9 -1	16	0/-9	46	0	33	1.1	15.2	421	804	40						
☆	LME12LUU	4	12		22		61								45.8	1.3	21	813	1570	80
☆	LME16LUU	5	16	+11 -1	26	-11	68	-300	49.8	1.3	24.9	921	1780	115						
☆	LME20LUU	5	20		32		80								61	1.6	30.5	1370	2740	180
☆	LME25LUU	6	25	+13 -2	40	0 -13	112	0	82	1.85	38	1570	3140	430						
☆	LME30LUU	6	30		47		123								104.2	1.85	44.5	2500	5490	615
☆	LME40LUU	6	40	+16 -4	62	0 -15	151	-400	121.2	2.15	59	3430	8040	1400						
	LME50LUU	6	50		75		192								155.2	2.65	72	6080	15900	2320
	LME60LUU	6	60		0/-20		209								170	3.15	86.5	7550	20000	3900

Note : ☆ means steel retainer is available.