



2-2 LME Series

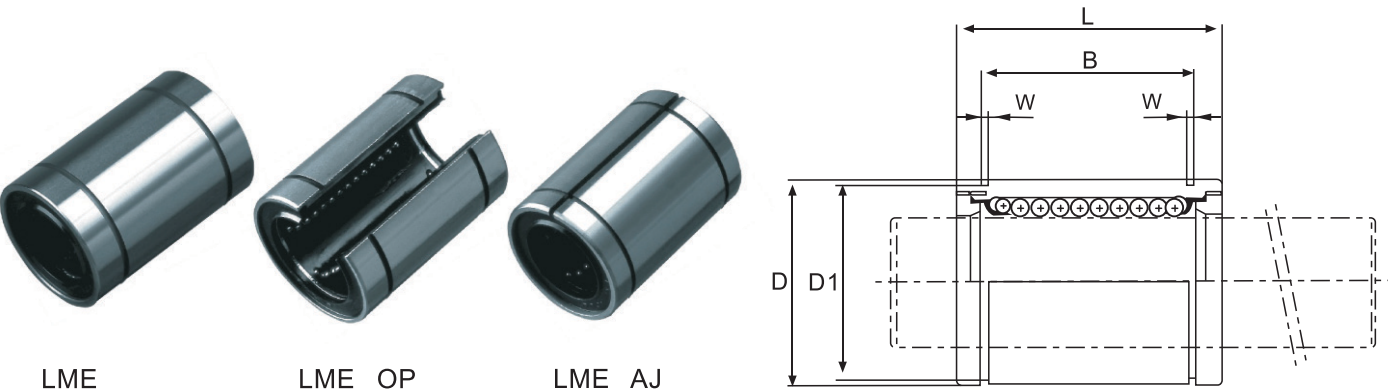

Part No.						Main Dimensions and Tolerance		
Seal Type	Ball Circuit	Open Type	Ball Circuit	Adjustable Type	Ball Circuit	dr (mm)	Tolerance (μm)	D (mm)
LME5UU	4	—	—	LME5UUAJ	4	5	+8 0	12
LME8UU	4	—	—	LME8UUAJ	4	8		16
☆ LME12UU	4	LME12UU-OP	3	☆ LME12UUAJ	4	12		22
☆ LME16UU	5	LME16UU-OP	4	☆ LME16UUAJ	5	16	+9 -1	26
☆ LME20UU	5	LME20UU-OP	4	☆ LME20UUAJ	5	20		32
☆ LME25UU	6	LME25UU-OP	5	☆ LME25UUAJ	6	25		40
☆ LME30UU	6	LME30UU-OP	5	☆ LME30UUAJ	6	30	+11 -1	47
☆ LME40UU	6	LME40UU-OP	5	☆ LME40UUAJ	6	40		62
LME50UU	6	LME50UU-OP	5	LME50UUAJ	6	50		75
LME60UU	6	LME60UU-OP	5	LME60UUAJ	6	60	+13 -2	90

Note : ☆ means steel retainer is available.

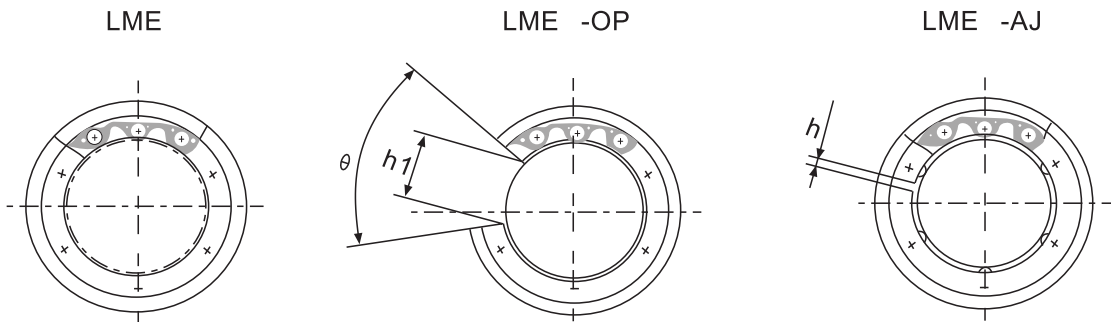

Main Dimensions and Tolerance										Eccentricity (max) μm	Radial Clearance (max) μm	Basic Load Rating C Co		Weight (g)
Tolerance (μm)	L (mm)	Tolerance (μm)	B (mm)	Tolerance (μm)	W (mm)	D1 (mm)	h (mm)	h1 (mm)	θ			N	N	
0 -8	22	0 -200	14.5	0 -300	1.1	11.5	1	-	-	12	-3	206	265	11
	25		16.5		1.1	15.2	1	-	-			265	402	22
0 -9	32		22.9		1.3	21	1.5	7.5	78°		-4	510	784	45
	36		24.9		1.3	24.9	1.5	10	78°			775	1180	60
0 -11	45	0 -300	31.5	0 -400	1.6	30.3	2	10	60°	15	-6	862	1370	102
	58		44.1		1.85	37.5	2	12.5	60°			980	1570	235
	68		52.1		1.85	44.5	2	12.5	50°		-8	1570	2740	360
0 -13	80		60.6		2.15	59	3	16.8	50°			2160	4020	770
	100		77.6		2.65	72	3	21	50°	17	-13	3820	7940	1250
0/-15	125	(0/-400)	101.7		3.15	86.5	3	27.2	54°	20		4700	9800	2220