

## FLAT HINGE WITH THREADED STUDS

**Material:**

Reinforced polyamide.  
Oils and greases resistant.

**Surface:**  
Satin.




**Colour:**  
Black (RAL 9011).

**Inserts:**

- Zinc plated steel pin.
- Zinc plated steel threaded stud (tolerance 6g).

**SPECIAL REQUESTS:**

- It is possible to supply inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table on page O-19, on request and for quantities.

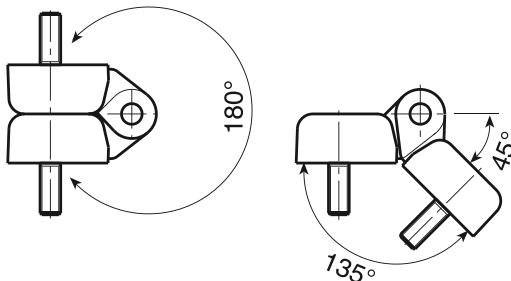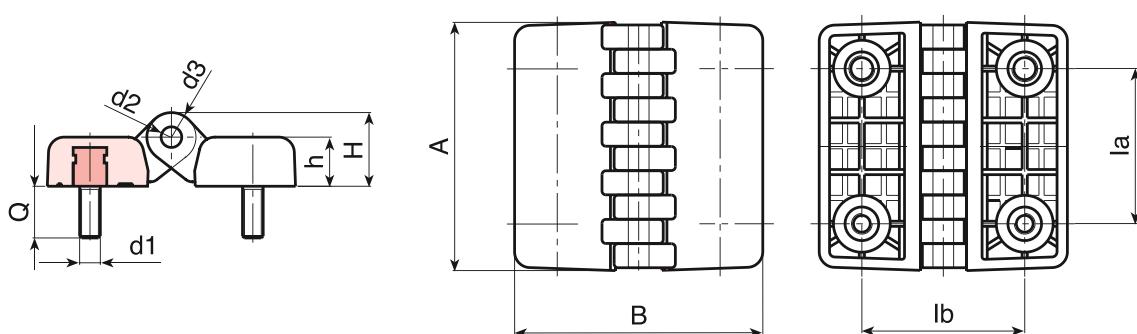

	art.	la	lb	A	B	h	H	d2	d3	d1 6g	Q	ΔΔ g	F1 (N)	F2 (N)
●	O43130.TM05X1501	30	30	48	48	10,5	15,5	5	10	M05	15	49	1780	1370
●	O43130.TM06X1501	30	30	48	48	10,5	15,5	5	10	M06	15	52	1780	1370
●	O43140.TM06X2001	40	40	64	64	13	19	5	12	M06	20	90	4120	1760
●	O43140.TM08X2001	40	40	64	64	13	19	5	12	M08	20	100	4120	1760
●	O43160.TM08X2001	60	63	95	95	19	28,5	8	18	M08	20	260	4900	1275
●	O43160.TM10X2001	60	63	95	95	19	28,5	8	18	M10	20	278	4900	1275

Presumable presence in the stock in %

90% ●

40% ●

5% ●